
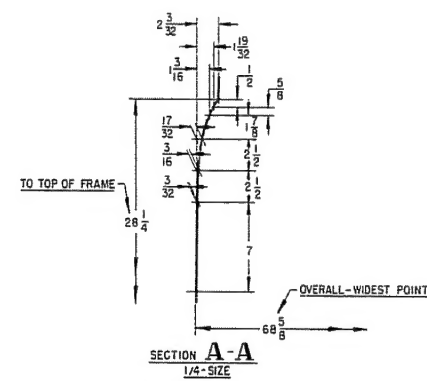





FRONT SPRINGS			
M	LOAD	RATE LBS.	SPRG. N°
	PER SPRG.	PER INCH	
12 1/16	2200	579	1261068
13 3/16	2600	796	1261161

REAR SPRINGS			
L	LOAD	RATE LBS.	SPRG. N°
	PER SPRG.	PER INCH	
13 9/16	7000	2825	576735
16	UP TO 3990	1450	
13 11/16	8500	3420	924313
16	UP TO 4910	1785	



TIRE SIZE	RIM SIZE	A	B	C	D	E	F	G	H	P
7.50/20	10P	20X6	70 1/2							
8.25/20	10P	20X6	70 1/2							
8.25/20	12P	20X6	70 1/2							
9.00/20	10P	20X7	68 3/8							
10.00/20	12P	20X7	68 3/8							
10.00/20	12P	20X8	68 1/2							
11.00/20	12P	20X8	68 1/2							
8.25/20	10P	20X6		11	2.07	70 3/8	6.69	25.22	18.07	4 90.30
8.25/20	12P	20X6		11	2.07	70 3/8	6.69	25.22	18.14	4 90.30
9.00/20	10P	20X7		13	2.75	70 3/8	9.64	23.56	18.89	4 93.62
10.00/20	12P	20X7		13	2.38	70 3/8	10.44	23.37	19.68	4 1/2 94.00
11.00/20	12P	20X8		12.84	1.53	70 3/8	11.09	22.11	21.10	4 1/2 94.52

NOTE: ABOVE CHART FOR PROD. 21000\* G.V.W. JOBS.  
FOR EX. EQ. 23000\* G.V.W. JOBS ADD 1/2 TO "D", "E", "F", "G" ADD 1/4 TO "F".

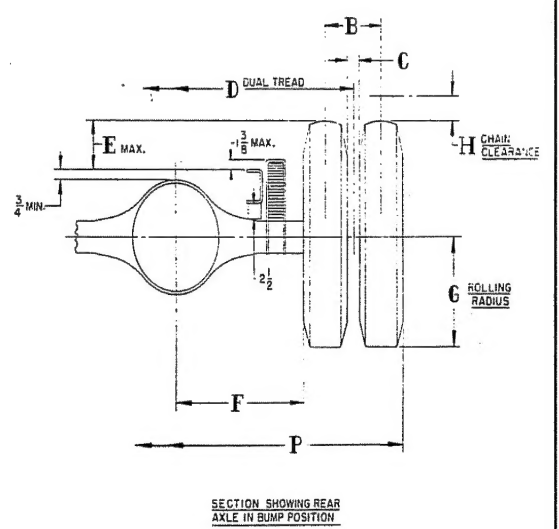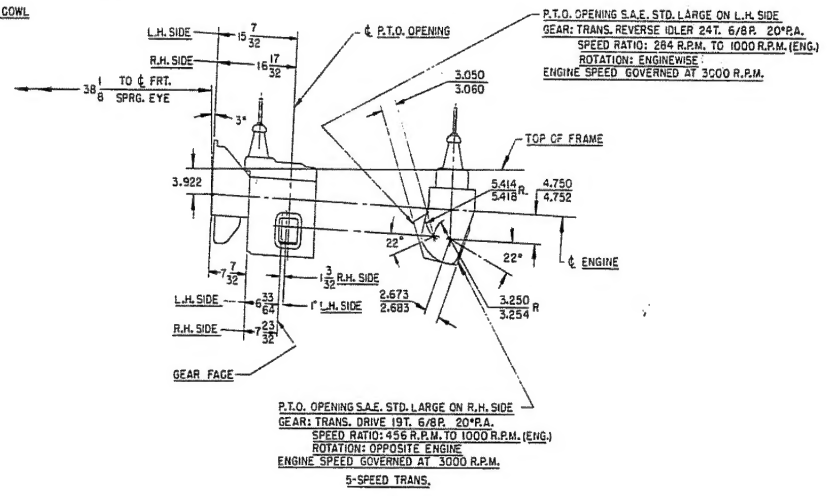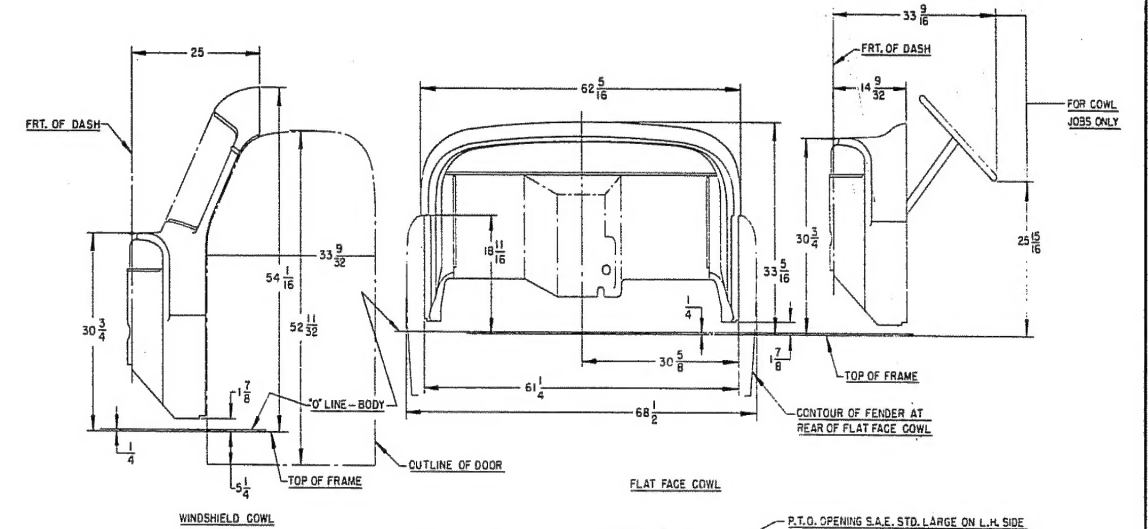

BODY BUILDERS LAYOUT  
T, TA, V, VA 154", 172", 190" W.B.